



+44 (0)1509 881289



sales@foa-ltd.co.uk



www.foa-ltd.co.uk

EUROLENS

2 to 12 Channel Expanded Beam Connector (Compatible with MIL-DTL-83526/20 & 21)



Key Features

- Expanded Beam technology
- Multimode & Singlemode Options
- Hermaphroditic Interface
- 2, 4, 8 & 12 channels available
- Compatible with MIL-DTL-83526/20 & 21
- Easy clean & maintain

The EUROLENS family of connectors are compatible with MIL-DTL-83526/20 & 21 and utilise expanded beam technology. Ideal for both Military and Industrial applications, these connectors have been designed for use in the most demanding harsh environment applications and provide the ultimate in reliable performance.

The Hermaphroditic coupling allows for rapid deployment, creating low loss Singlemode and Multimode links with the ability to daisy chain without the need for plugs and receptacles.

Benefitting from expanded beam technology, the design and packaging provides a robust connectivity solution resistant to corrosion, mechanical and thermal shock and offers ease of cleaning.

An example of some of the markets where EB Series are used:

- Deployable military tactical systems
- Mobile tactical shelters
- Security and surveillance
- Emergency telecommunications stations





+44 (0)1509 881289



sales@foa-ltd.co.uk




www.foa-ltd.co.uk

EUROLENS

2 to 12 Channel Expanded Beam Connector (Compatible with MIL-DTL-83526/20 & 21)

Lens Arrangement

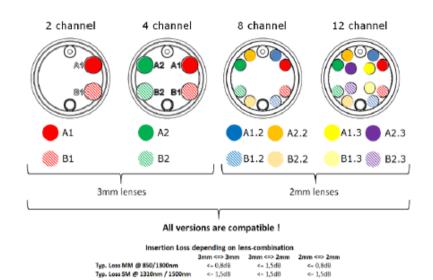

The EUROLENS system is the only expanded beam fiber optic connector system on the market where all 2 to 12 channel plugs and receptacles are fully compatible with each other.

Specification

| | Multimode | Singlemode |
|-------------------------|----------------------------------|------------------------|
| Insertion Loss, typical | <0,8 dB @850/1300nm | <1.5 dB @1310nm/1550nm |
| Return Loss (mated) | >31 dB | >31 dB |
| Operating temperature | -55°C to +85°C | |
| Storage temperature | -55°C to +85°C | |
| Mating cycles | 3,000 cycles | |
| Strain relief | 1,500 N | |
| Immersion | 15m, water (Plug and Receptacle) | |
| Protection Class | IP67 (mated or with dust cap) | |





+44 (0)1509 881289



sales@foa-ltd.co.uk





www.foa-ltd.co.uk


EUROLENS


2 to 12 Channel Expanded Beam Connector (Compatible with MIL-DTL-83526/20 & 21)

Dimensions

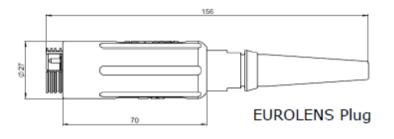







EUROLENS Receptacle Flange Mount

EUROLENS Receptacle Jam Nut Mount



EUROLENS Plug



EUROLENS Receptacle Flange Mount



EUROLENS Receptacle Jam Nut Mount